

# SLOPE SOLUTION

— UP TO 34° —



The leader in all-terrain mowing technology, the 72LC is the safe solution to tackling steep slopes. The automatic self-leveling system keeps the operator and the engine upright on slopes up to 34 degrees, improving safety and performance. Reliable front and rear traction wheels provide the ability to navigate straight across the hillsides. The two halves of the 72 inch deck float independent for a quality cut and fewer passes over ditches and rough terrain. This superior technology balances comfort and control, decreasing the risk for rollovers.

**#slopesolutions**



**GSA** Contract Holder

## ATM 72LC FEATURES

UP TO 34° SELF-LEVELING SYSTEM

SWINGING DECK BLADES

# HARPER®

TURF EQUIPMENT




HarperTurfEquipment.com | (620) 896-7381

## ACCESSORIES

FINISHING CUT FIXED BLADES

SUN SHADE CANOPY

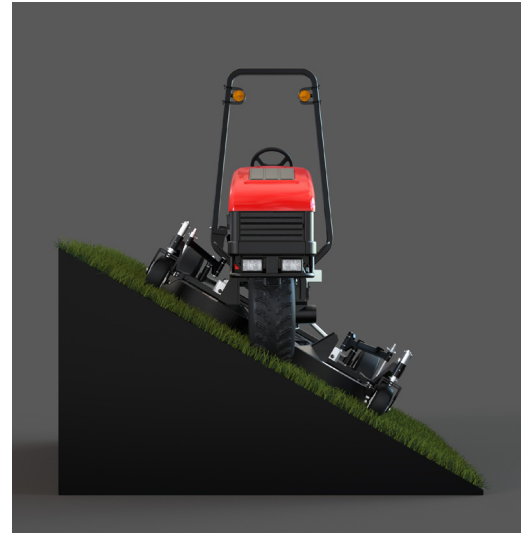

### SPECIFICATIONS

### ATM 72LC

Engine	24.8 HP @ 2300 RPM gross rating: Kubota Liquid Cooled 4-Cylinder Diesel Engine, Industrial Use Rating
Electrical System	12 Volt, 40 Amp Electrical System
Blade Drive	Hydraulic drive - no belts or gear boxes
Ground Drive	Poclair Hydrostatic Transmission - PM10 variable displacement axial piston pump. Poclair High Efficiency Axial Piston Wheel Motors with Integrated Parking Brake
Speed Control	Foot-operated speed control - self centering to neutral
Ground Speed	0-7 MPH ground speed
Weight	2,480 lbs. (1,125 kg)
Deck Caster Tire	11" X 4.00 - 5" - foam filled
Drive Tire	25" X 11-12 - 6 Ply
Stabilizer Tire	16.5" X 6.5 - 8" - foam filled
Leveling	Automatic hydraulic self-leveling to 34 degrees with Manual Override mounted on arm rest
Deck Lift	Hydraulic lift with switch on dash
Parking Brake	Hydrostat integrated with dashboard on/off switch

### Indicator Lights

Gauges	High Engine Temp, Parking Brake, Low Hydraulic Oil, Glow Plug, Leveling Lockout, Mower Blades Engaged, Low Voltage, Park Brake
Fuel Capacity	Hour meter, engine temperature, fuel level
Hydraulic Oil Capacity	10 Gallon (U.S.)
Seat	Reservoir 11.5 Gallon (U.S.) with Hydraulic oil cooler
System Filter	Adjustable suspension seat with arm rests and retracting seat belt
Cutting Width & Height	Hydraulic filter, 10 micron with indicator
Overall Dimensions	Width: 72" Height: Adjustable from 3" to 7.5"
Inside Turning Radius	107" length, 74.5" width, 90" height
Rear Discharge	24" diameter
Safety	Two 36" decks, independently free floating
Deck Construction	Certified ROPS with hazard lights, meets ANSI/OPEI B7 1.4 Standards
Frame	Rugged, reinforced 10 gauge steel
Warranty	Formed and welded steel
	1-year parts and labors (unlimited hours)